

QPD12-300-18000-30-S

12-Way, 0.3~18GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.3~18GHz
Insertion Loss:	10dB max.
Input VSWR:	1.6 max.
Output VSWR:	1.6 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±12°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 5W max. as combiner

Mechanical


Size*1:	312.4*156*12.7mm 12.299*6.142*0.5in
Connectors:	SMA Female
Mounting:	6-Φ3.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Operation Temperature:	-55~+100°C

Outline Drawings

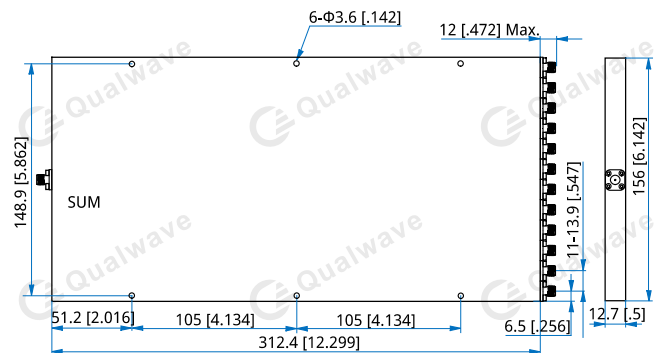

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD12-300-18000-30-S

Customization is available upon request.