

## QDDC-4000-6000-K4-40-NS

4~6GHz, 400W, 40dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	4~6GHz
Insertion Loss:	0.6dB max.
Coupling:	40±1.5dB
VSWR:	1.3 max.
Average Power:	400W min.
Directivity:	10dB min.

### Mechanical

Size <sup>*1</sup> :	50*50*22.6mm 1.969*1.969*0.89in
Connectors:	SMA Female, N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

### Outline Drawings

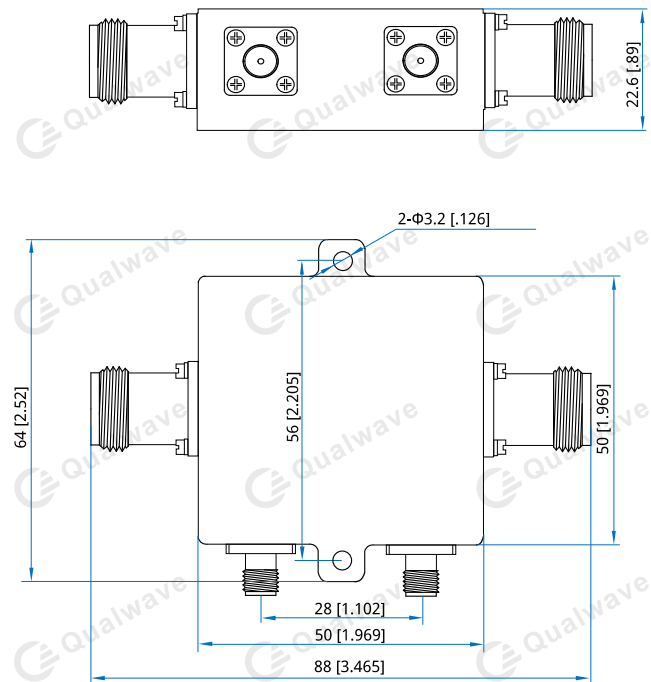

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**QDDC-4000-6000-K4-40-NS**

Customization is available upon request.