

QPD12-700-6000-30-S

12-Way, 0.7~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.7~6GHz
Insertion Loss:	4.3dB max.
Isolation:	16dB min.
VSWR:	1.6 max.
Amplitude Balance:	±1dB max.
Phase Balance:	±20° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider

Mechanical


Size ^{*1} :	272*106*10mm 10.709*4.173*0.394in
Connectors:	SMA Female
Mounting:	5-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+75°C
------------------------	-----------

Outline Drawings

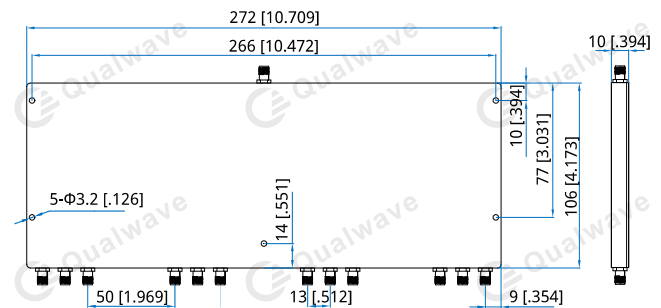

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD12-700-6000-30-S

Customization is available upon request.