

## QPD16-5-1000-2-S

### 16-Way, 5~1000MHz, 2W

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	5~1000MHz
Insertion Loss:	24±2.0dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	24dB min.
Amplitude Balance:	±1.2dB
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

#### Mechanical


Size <sup>*1</sup> :	81.3*80.9*16mm 3.201*3.185*0.63in
Connectors:	SMA Female

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

#### Outline Drawings

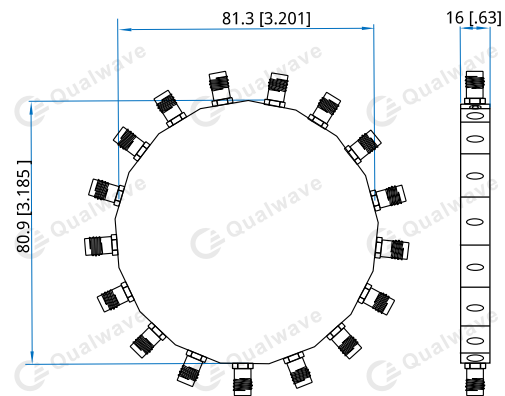

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD16-5-1000-2-S**

Customization is available upon request.