

QPD16-5-300-1-S

16-Way, 5~300MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	5~300MHz
Insertion Loss:	2.7dB max.
VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	±0.9dB max.
Phase Balance:	±15° max.
Impedance:	50Ω
Power @SUM Port:	1W max. as divider

Mechanical


Size ^{*1} :	50*209*10mm 1.969*8.228*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+80°C
------------------------	-----------

Outline Drawings

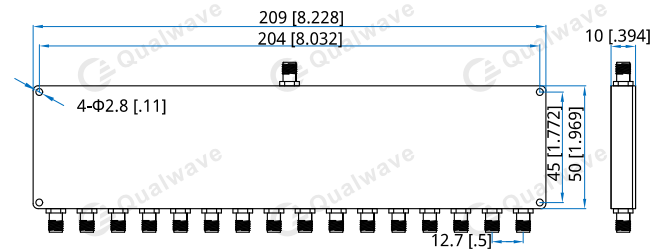

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD16-5-300-1-S

Customization is available upon request.