

QPD16-600-6000-30-S

16-Way, 0.6~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.6~6GHz
Insertion Loss:	4.5dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	140*232*12mm 5.512*9.134*0.472in
Weight:	950g
Connectors:	SMA Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

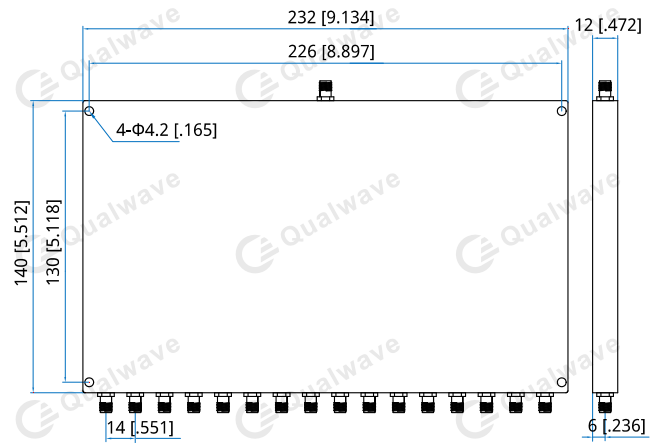

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD16-600-6000-30-S

Customization is available upon request.