

QHC8-1.6-30-2K5-N

0.0016~0.03GHz, 2500W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.0016~0.03GHz
Insertion Loss:	0.2dB max.
VSWR:	1.2 max.
Isolation:	25dB min.
Amplitude Balance:	±0.1dB max.
Phase Balance:	±3° max.
Average Power:	2500W
Impedance:	50Ω

Mechanical


Size*1:	88*80*36mm 3.465*3.15*1.417in
Connectors:	N Female
Mounting:	4-Φ4.5mm through hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

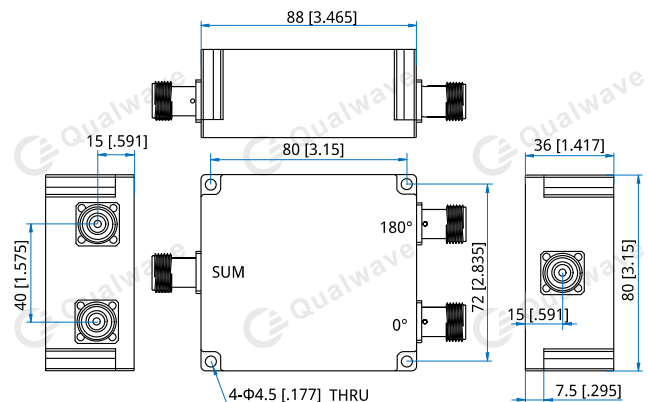

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QHC8-1.6-30-2K5-N

Customization is available upon request.