

QHC8-1000-6000-30-S

1~6GHz, 30W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	1~6GHz
Insertion Loss:	1.8dB max.
Isolation:	18dB min.
VSWR:	1.4 max.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±7° max.
Average Power:	30W max.

Mechanical


Size*1:	150*44.5*12.7mm 5.906*1.752*0.5in
Connectors:	SMA Female
Mounting:	2-Φ2.4mm through-hole 8-M2.5*6

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

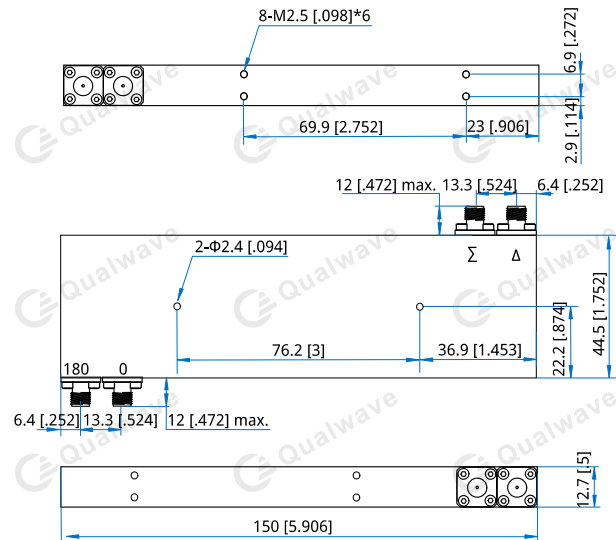

Unit: mm [in]

Tolerance: .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

QHC8-1000-6000-30-S

Customization is available upon request.