

QHC8-1200-2700-10-S

1.2~2.7GHz, 10W

Features: * Broadband

Applications:

- * High Dower
- * Amplifiers
- * High Power * Low Insertion Loss
- * Transmitter * Laboratory Test
- * Radar

Electrical

Frequency: 1.2~2.7GHz
Insertion Loss: 0.8dB max.
Isolation: 20dB min.

VSWR: 1.35 max.
Balance: ±0.8dB

Amplitude Balance: ± 0.8 dB Phase Balance: $180\pm 10^{\circ}$ Average Power: 10W Impedance: 50Ω

Mechanical

Size*1: 65*60*14mm

2.559*2.362*0.551in

RF Connectors: SMA Female


Mounting: 2-Φ3mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -30~+70°C

Outline Drawings

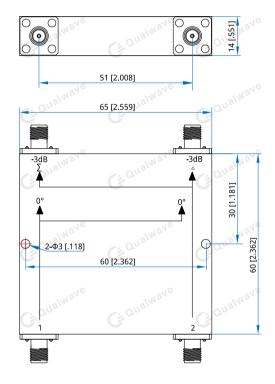

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-1200-2700-10-S

Customization is available upon request.