

QHC8-24000-44000-20-2

24~44GHz, 20W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	24~44GHz
Insertion Loss:	3.4dB max.
VSWR:	1.8 max.
Isolation:	14dB min.
Amplitude Balance:	±1.1dB max.
Phase Balance:	±11° max.
Average Power:	20W max.
Impedance:	50Ω

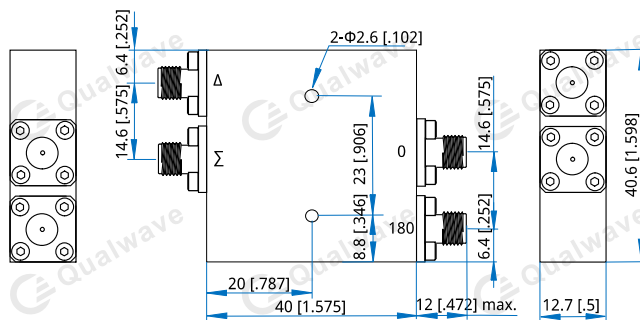
Mechanical

Size*1:	40*40.6*12.7mm 1.575*1.598*0.5in
Connectors:	2.4mm Female
Mounting:	2-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xxx±0.1mm [±0.004in]

How To Order

QHC8-24000-44000-20-2

Customization is available upon request.