

QHC8-26500-40000-20-K

26.5~40GHz, 20W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	26.5~40GHz
Insertion Loss:	2.9dB max.
VSWR:	1.7 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	±10° max.
Average Power:	20W max.
Impedance:	50Ω

Mechanical


Size*1:	40*40.6*12.7mm 1.575*1.598*0.5in
Connectors:	2.92mm Female
Mounting:	2-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

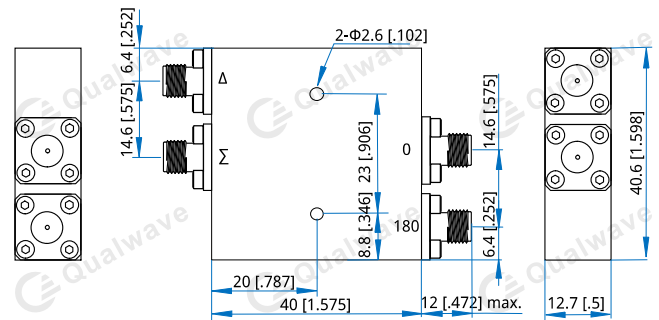

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xxx±0.1mm [±0.004in]

How To Order

QHC8-26500-40000-20-K

Customization is available upon request.