

QHC8-2700-3400-30-S

2.7~3.4GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.7~3.4GHz
Insertion Loss:	0.4dB max.
Isolation:	20dB min.
VSWR:	1.35 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Average Power:	30W
Impedance:	50Ω

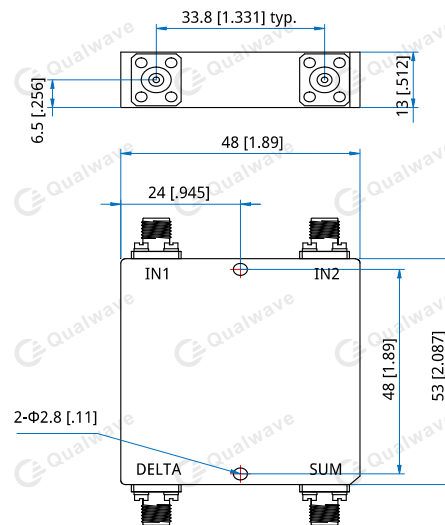
Mechanical

Size ^{*1} :	48*53*13mm 1.89*2.087*0.512in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC8-2700-3400-30-S

Customization is available upon request.