

QPD2-2000-23000-K1-S

2-Way, 2~2.3GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	2~2.3GHz
Insertion Loss:	0.4dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	100W max.as divider

Mechanical


Size ^{*1} :	31.95*31.75*19.05mm 1.258*1.25*0.75in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

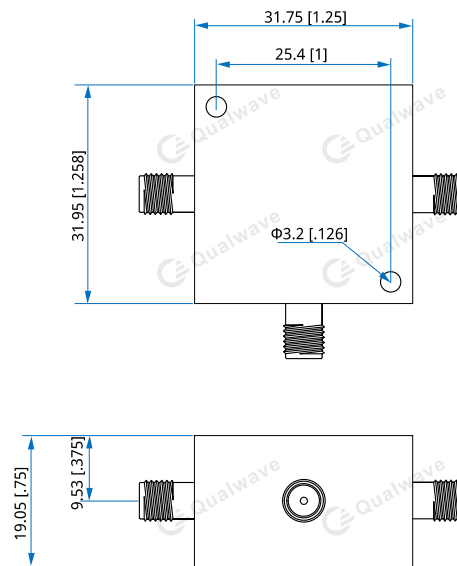

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-2000-2300-K1-S

Customization is available upon request.