

QPD2-30-3000-1-S

2-Way, 0.03~3GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.03~3GHz
Insertion Loss:	2.5dB max.
Input VSWR:	2.2 max.
Output VSWR:	2.2 max.
Isolation:	10dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4° max.
Impedance:	50Ω
Power @SUM Port:	1W max. as divider 0.5W max. as combiner

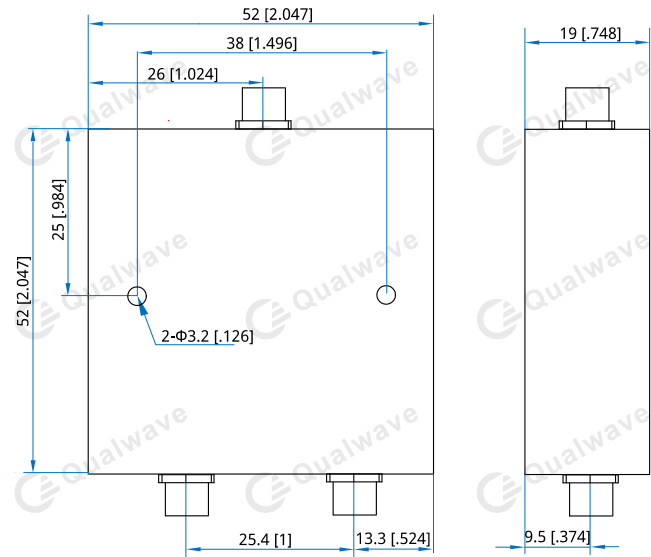
Mechanical

Size ^{*1} :	52*52*19mm 2.047*2.047*0.748in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-30-3000-1-S

Customization is available upon request.