

QPD2-4-30-K8-N

2-Way, 4~30MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	4~30MHz
Insertion Loss:	0.3dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Impedance:	50Ω
Power @SUM Port:	800W max. as divider 800W max. as combiner

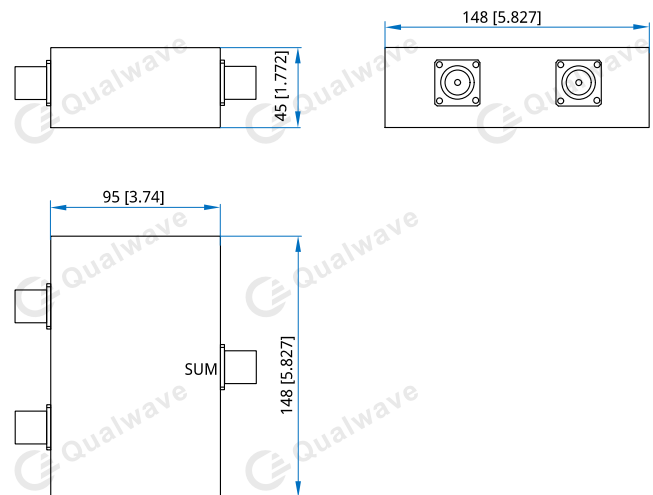
Mechanical

Size ^{*1} :	148*148*45mm 5.827*5.827*1.772in
Connectors:	N Female

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+60°C
Non-operation Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD2-4-30-K8-N

Customization is available upon request.