

# QPD2-5200-5900-K1-S

## 2-Way, 5.2~5.9GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	5.2~5.9GHz
Insertion Loss:	0.4dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	100W max.as divider 100W max. as combiner

### Mechanical


Size <sup>*1</sup> :	40*50*12mm 1.575*1.969*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

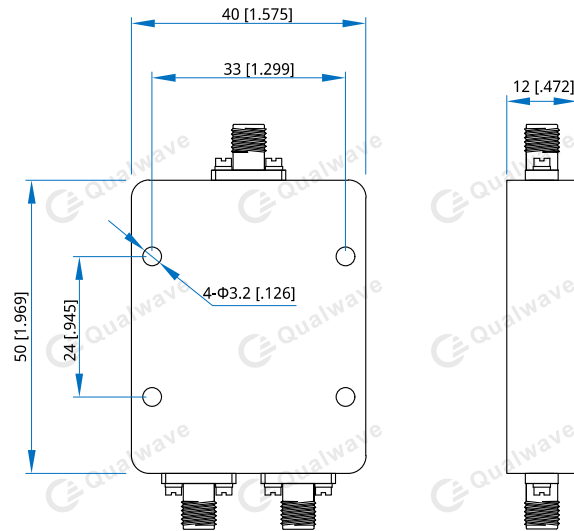

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**QPD2-5200-5900-K1-S**

Customization is available upon request.