



QPD2-68-72-30-N

2-Way, 0.068~0.072GHz

Features: * Small Size * Low Insertion Loss Applications: * Amplifiers * Mixers

* Antennas * Laboratory Test

Electrical

Frequency: 0.068~0.072GHz Insertion Loss: 0.4dB max. Input VSWR: 1.2 max. Output VSWR: 1.2 max.

20dB min. Isolation: Amplitude Balance: 0.2dB max.

±2° Phase Balance: Impedance: 50Ω

Power @SUM Port: 30W max. as divider

2W max. as combiner

Mechanical

Size*1: 106*82*22mm

4.173*3.228*0.866in

Weight: 480g Connectors: N Female


Mounting: 4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

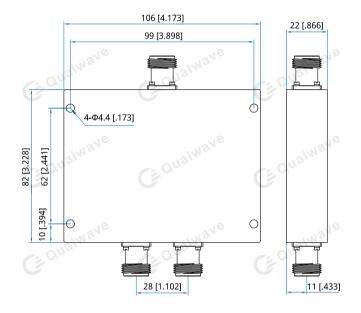

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-68-72-30-N

Customization is available upon request.