

QPD2-70-2700-K1-N

2-Way, 0.07~2.7GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.07~2.7GHz
Insertion Loss:	2dB max.
Input VSWR:	1.5 max.@70~100MHz 1.25 max.@100~2700MHz
Output VSWR:	1.2 max.
Isolation:	15dB min. @70~100MHz 20dB min. @100~2700MHz
Amplitude Balance:	0.2dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	100W max. as divider 5W max. as Combiner

Mechanical


Size ^{*1} :	334*60*20mm 13.15*2.362*.787in
Weight:	1.1Kg
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

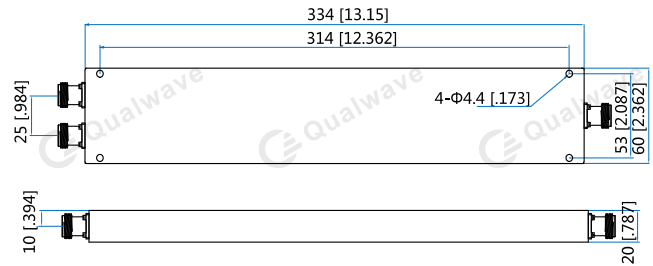

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-70-2700-K1-N

Customization is available upon request.