

QPD2-8000-12000-20-S

2-Way, 8~12GHz



Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	8~12GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.1dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	20W max.as divider 1W max. as combiner

Mechanical

Size ^{*1} :	28*28*10mm 1.102*1.024*0.394in
Connectors ^{*2} :	SMA Female
Mounting:	2-Φ2.2mm through-hole


[1] Exclude connectors.

[2] Female connectors can be replaced with male connectors on request.

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

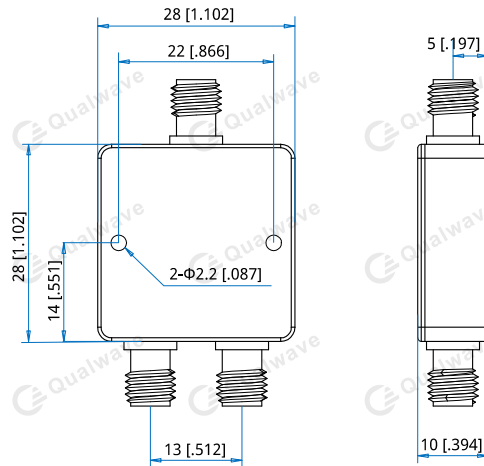

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]


How To Order

QPD2-8000-12000-20-S


Customization is available upon request.

Typical Performance Curves

Input VSWR vs. Frequency

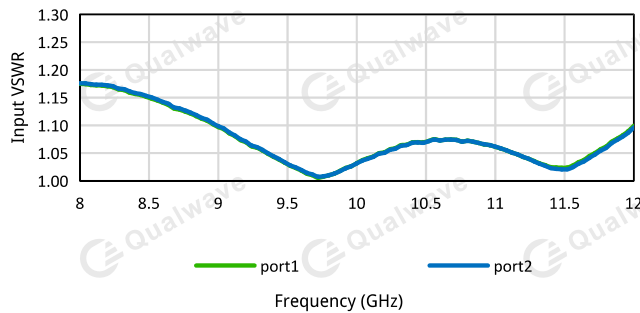


Output VSWR vs. Frequency

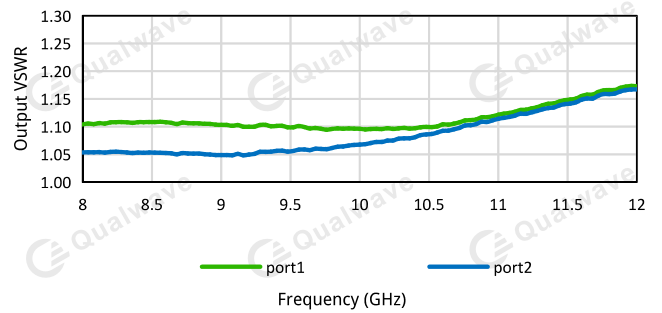


2-Way Power Divider/Combiner


Insertion Loss vs. Frequency

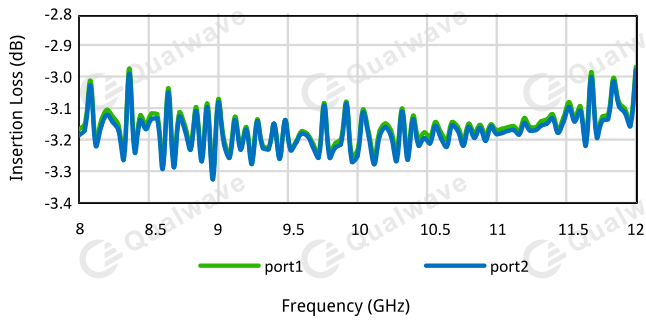

Isolation vs. Frequency

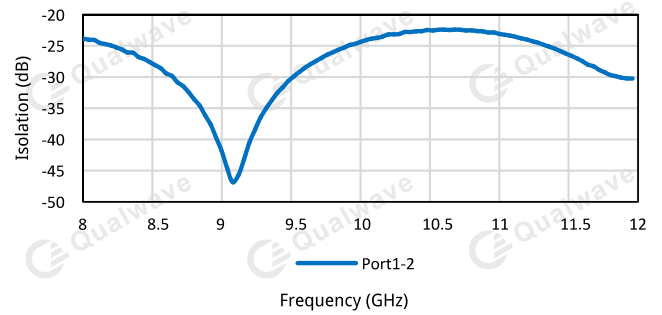

Amplitude balance vs. Frequency

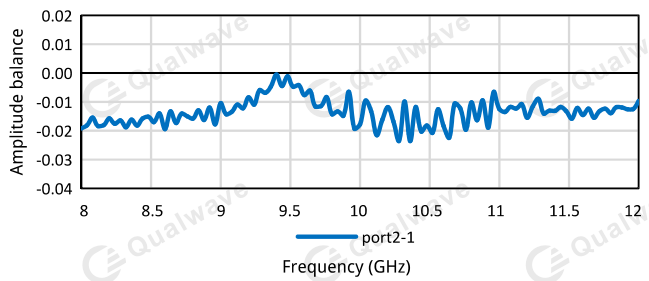

Phase balance vs. Frequency

