

QPD3-400-2000-30-S

3-Way, 0.4~2GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.4~2GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±10° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider

Mechanical


Size ^{*1} :	100*70*12mm 3.937*2.756*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings

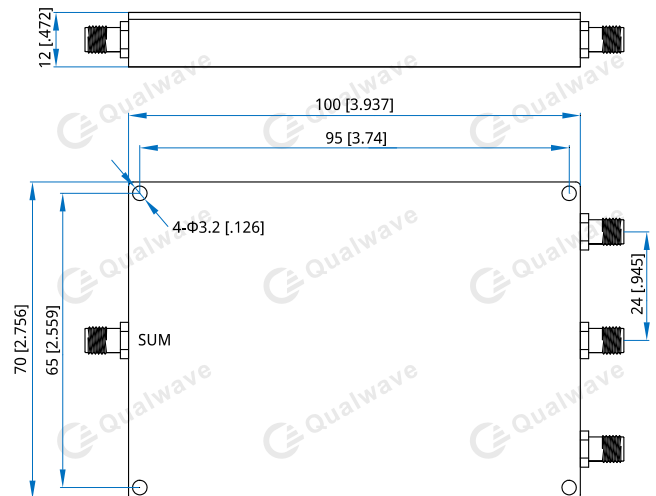

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD3-400-2000-30-S

Customization is available upon request.