

QPD4-10-500-K1-S

4-Way, 0.01~0.5GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.01~0.5GHz
Insertion Loss:	0.7dB max.
VSWR:	1.6 max. @10-30MHz 1.35 max. @30-500MHz
Isolation:	12dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	100W as divider

Mechanical


Size ^{*1} :	100*78*30mm 3.937*3.071*1.181in
Connectors:	SMA Female
Mounting:	4-Φ3.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85
------------------------	---------

Outline Drawings

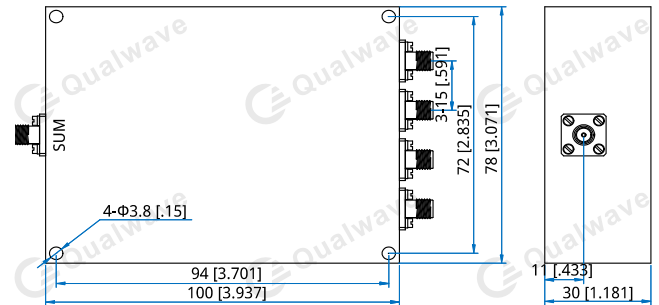

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-10-500-K1-S

Customization is available upon request.