QPD4-200-250-30-S

4-Way, 0.2~0.25GHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers
* Antennas
* Laboratory Test

Electrical

Frequency:	0.2~0.25GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Size[*1]:	118*112*14mm 4.646*4.409*0.551in
Connectors:	SMA Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75℃

Outline Drawings

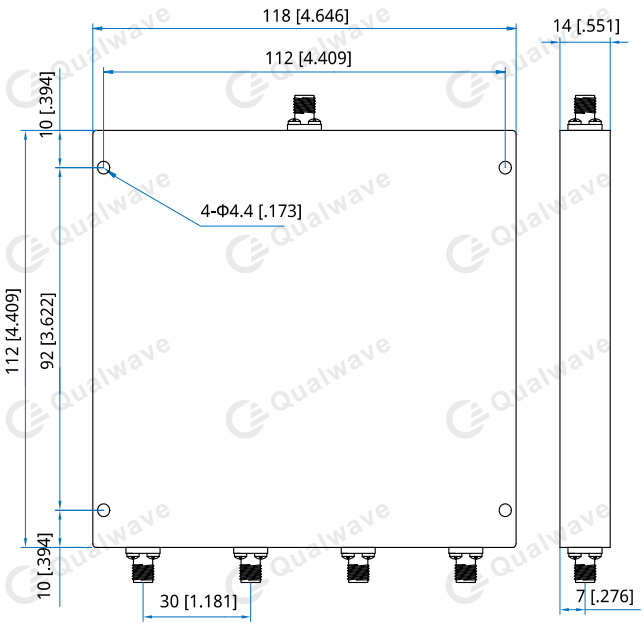

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-200-250-30-S

Customization is available upon request.