

## QPD4-2000-26500-20-S

### 4-Way, 2~26.5GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	2~26.5GHz
Insertion Loss:	2.6dB max.
Input VSWR:	1.7 max.
Output VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±0.5dB
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

#### Mechanical


Size <sup>*1</sup> :	88*52*10mm 3.465*2.047*0.394in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

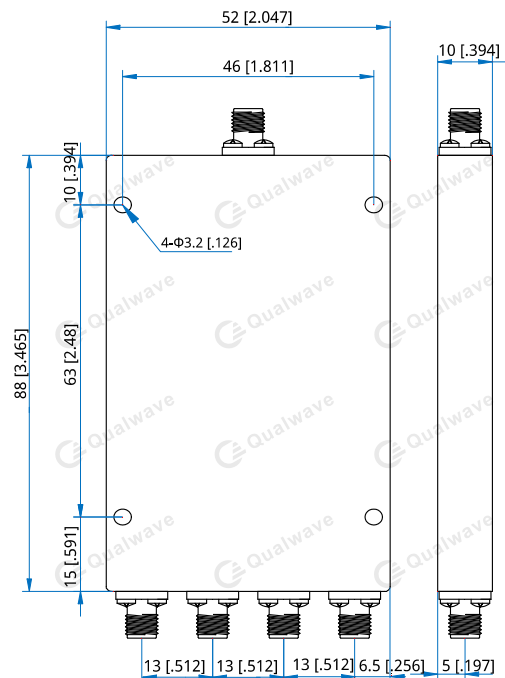

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD4-2000-26500-20-S**

Customization is available upon request.