

QPD4-225-400-K1-N

4-Way, 0.225~0.4GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.225~0.4GHz
Insertion Loss:	0.35dB max.
Input VSWR:	1.25 max.
Oupt VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.1dB max.
Phase Balance:	±1° max.
Impedance:	50Ω
Power @SUM Port:	100W as divider

Mechanical


Size ^{*1} :	172.72*132.08*20.32mm 6.8*5.2*0.8in
Connectors:	N Female
Mounting:	4-Φ4.32mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

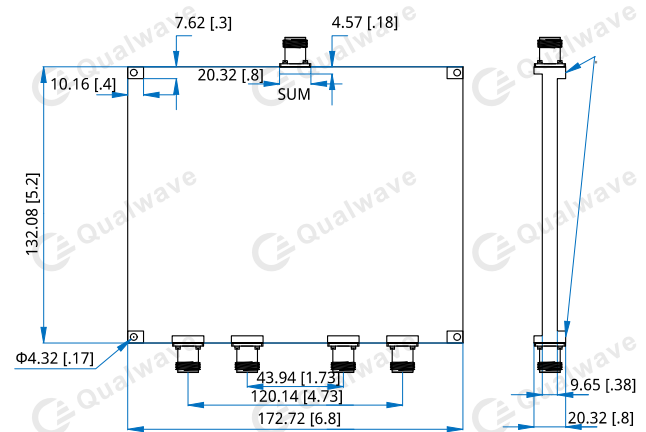

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

*: Position mounting surface is not painted.

How To Order

QPD4-225-400-K1-N

Customization is available upon request.