

QPD4-3-30-2K-N

4-Way, 3~30MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	3~30MHz
Insertion Loss:	0.35dB max.
VSWR:	1.25 max.
Isolation:	20dB min.
Impedance:	50Ω
Power @SUM Port:	2000W as divider 2000W as combiner

Mechanical

Size*1:	168*204*74mm 6.614*8.032*2.913in
Connectors:	N Female


[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+60°C
Non-operation Temperature:	-55~+85°C

Outline Drawings

(Reference dimensions)

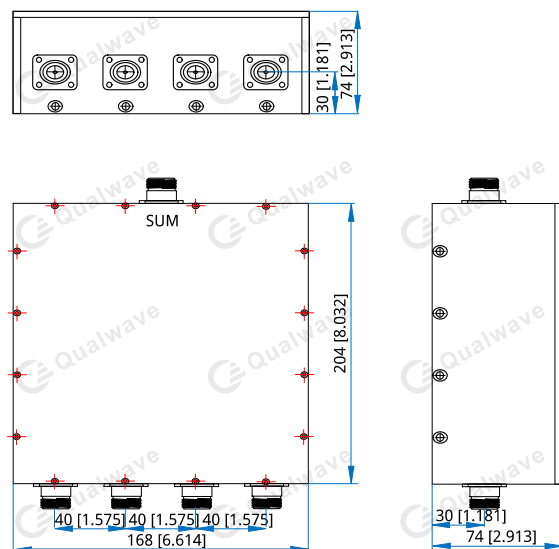

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-3-30-2K-N

Customization is available upon request.