

QPD4-3400-3800-K1-N

4-Way, 3.4~3.8GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

| | |
|--------------------|--|
| Frequency: | 3.4~3.8GHz |
| Insertion Loss: | 0.6dB max. |
| Input VSWR: | 1.25 max. |
| Output VSWR: | 1.2 max. |
| Isolation: | 20dB min. |
| Amplitude Balance: | ±0.2dB |
| Phase Balance: | ±3° |
| Impedance: | 50Ω |
| Power @SUM Port: | 100W max. as divider 10W max. as combiner |

Mechanical


| | |
|----------------------|-------------------------------------|
| Size ^{*1} : | 102*110*20mm 4.016*4.331*0.787in |
| Weight: | 650g |
| Connectors: | N Female |
| Mounting: | 4-Φ4.4mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|------------------------|-----------|
| Operation Temperature: | -35~+75°C |
|------------------------|-----------|

Outline Drawings

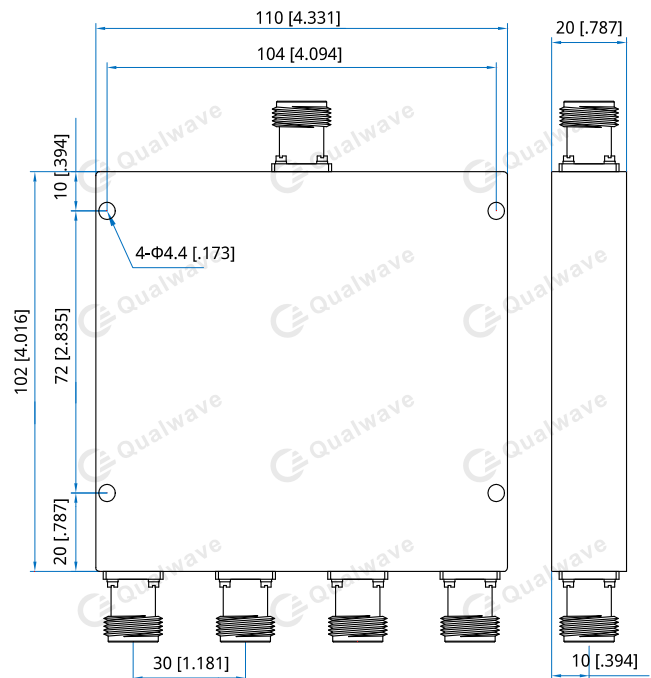

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-3400-3800-K1-N

Customization is available upon request.