

QPD4-80-500-30-S

4-Way, 0.08~0.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.08~0.5GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.20 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

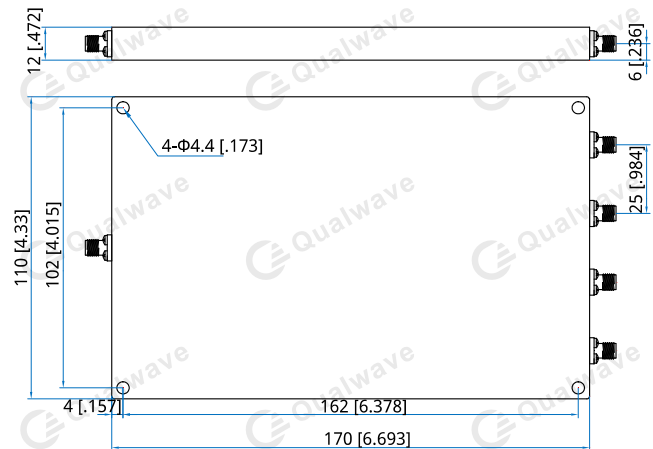
Mechanical

Size ^{*1} :	170*110*12mm 6.693*4.33*0.472in
Weight:	500g
Connectors:	SMA Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD4-80-500-30-S

Customization is available upon request.