

QPD5-2000-4000-20-S

5-Way, 2~4GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	2~4GHz
Insertion Loss:	1dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.8dB max.
Phase Balance:	±8°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

Mechanical


Size ^{*1} :	100*80*12mm 3.937*3.15**0.472in
Weight:	185g
Connectors:	SMA Female (Stainless steel)
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

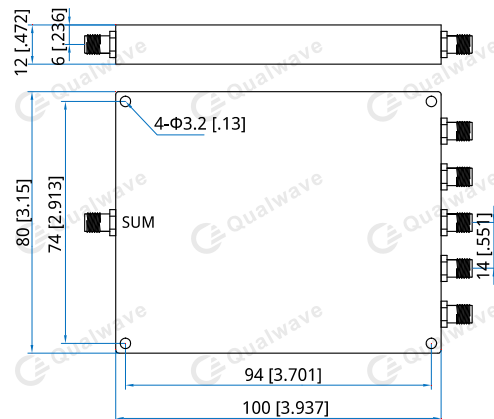

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

QP54-2000-4000-20-S

Customization is available upon request.