

# QPD6-1-200-2-S

## 6-Way, 1~200MHz, 2W

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	1~200MHz
Insertion Loss:	15.9dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	14.6dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

### Mechanical


Size <sup>*1</sup> :	92*44*12.5mm 3.622*1.732*0.492in
Weight:	135g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

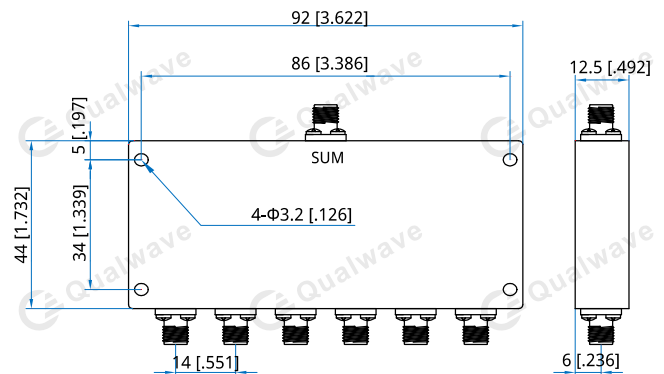

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

### How To Order

#### QPD6-1-200-2-S

Customization is available upon request.