

QPD6-2-250-2-S

6-Way, 2~250MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical


Frequency:	2~250MHz
Insertion Loss:	1.3dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.65 max.
Isolation:	20dB min.
Amplitude Balance:	±0.6dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

Mechanical

Size ^{*1} :	10*9.65*6.73mm 0.394*0.38*0.265in
Connectors:	SMA Female

[1] Exclude connectors.

Outline Drawings

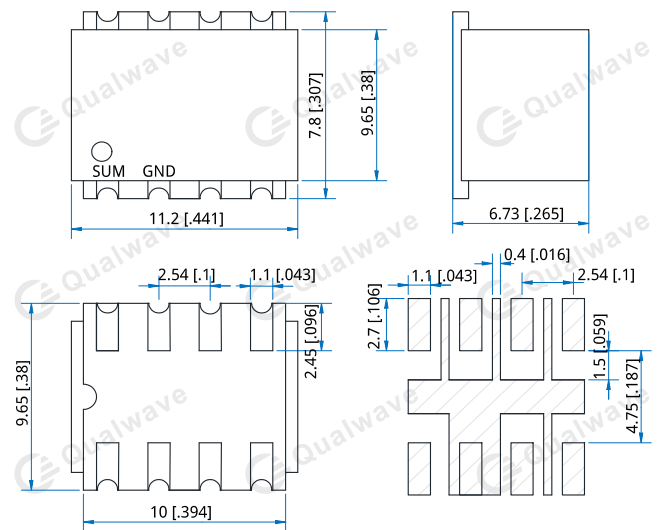

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD6-2-250-2-S

Customization is available upon request.