

# Q7A0302

## DC~3GHz, 2W

**Features:**

- \* Low VSWR
- \* High Attenuation Flatness

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	DC~3GHz
Attenuation:	10, 20, 30dB
VSWR:	1.15 max.@DC-1GHz 1.25 max.@DC-3GHz
Impedance:	75Ω
Average Power <sup>+1</sup> :	2W@25°C
Peak Power <sup>+2</sup> :	0.5KW

[1] Derated linearly to 0.5W@125°C

[2] Pulse width: 5us, duty cycle: 0.5%.

**Attenuation Accuracy**

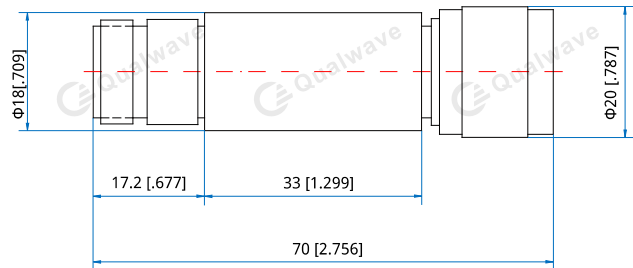
Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)		
	10	20	30
DC~1	±0.4	±0.4	±0.4
DC-3	±0.4	±0.5	±0.6

**Mechanical**

RF Connectors:	F, N, BNC
Housing:	Aluminum
Outer Conductor:	Nickel plated brass
Male Inner Conductor:	Gold plated brass
Female Inner Conductor:	Gold plated beryllium copper

**Environmental**

Temperature:	-55~+125°C
--------------	------------

**Outline Drawings**


Outline A

Unit: mm [in]

Tolerance: ±5%

**How To Order**

**Q7A0302-X-Y-Z**

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

F - F

N - N (Outline A)

B - BNC

Examples:

To order an attenuator, DC~3GHz, 10dB, N Male to N Female, specify Q7A0302-3-10-N.