



QPD8-1850-2700-K25-N

8-Way, 1.85~2.7GHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers

* Antennas * Laboratory Test

Electrical

Frequency: 1.85~2.7GHz
Insertion Loss: 0.8dB max.
Input VSWR: 1.3 max.
Output VSWR: 1.2 max.
Isolation: 18dB min.

Amplitude Balance: 0.4dB max.

Phase Balance: $\pm 4^{\circ}$ Impedance: 50Ω

Power @SUM Port: 250W max. as divider

15W max. as combiner

Mechanical

Size*1: 145*212*22mm

5.709*8.345*0.866in

Connectors: N Female


Mounting: 4-Φ5.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

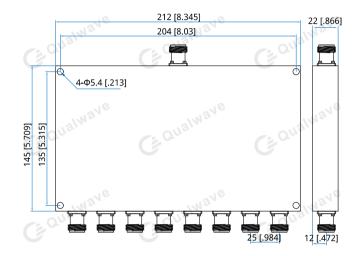

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-1850-2700-K25-N

Customization is available upon request.