

QPD8-2-250-1-S

8-Way, 2~250MHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	2~250MHz
Insertion Loss:	1dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	25dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±2° max.
Impedance:	50Ω
Power @SUM Port:	1W max. as divider

Mechanical


Size ^{*1} :	101.6*31.75*9.65mm 4*1.25*0.38in
Connectors:	SMA Female
Mounting:	4-#2-56X depth 7.62mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+125°C
------------------------	------------

Outline Drawings

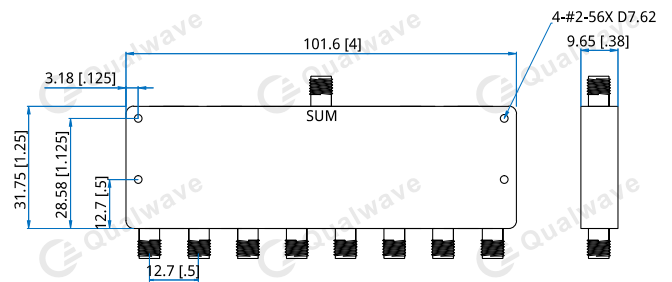

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-2-250-1-S

Customization is available upon request.