

## QPD8-30-3000-2-S

### 8-Way, 0.03~3GHz, 2W

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	0.03~3GHz
Insertion Loss:	18.5dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	17dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	2W as divider

#### Mechanical


Size <sup>*1</sup> :	120*60*12mm 4.724*2.362*0.472in
Weight:	211g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

#### Outline Drawings

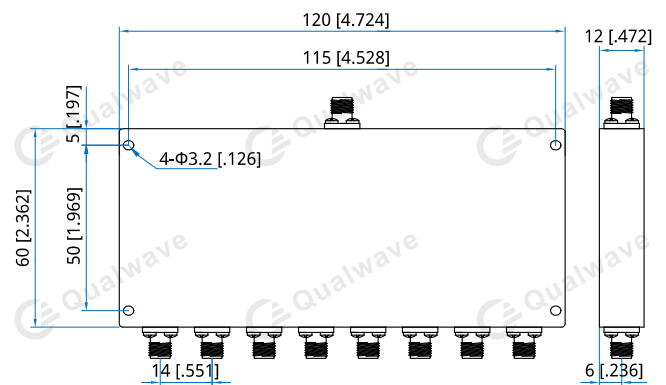

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**QPD8-30-3000-2-S**

Customization is available upon request.