

QPD8-400-6000-80-S

8-Way, 0.4~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.4~6GHz
Insertion Loss:	6dB max.
Input VSWR:	1.6 max. (400~500MHz) 1.3 max. (500~6000MHz)
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	80W max. as divider 5W max. as combiner

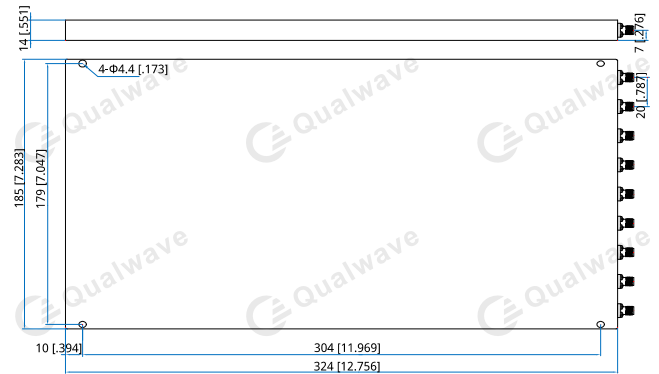
Mechanical

Size ^{*1} :	324*185*14mm 12.756*7.283*0.551in
Weight:	1500g
Connectors:	SMA Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD8-400-6000-80-S

Customization is available upon request.