

QHC9-2000-26500-30-S

2~26.5GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~26.5GHz
Insertion Loss:	2dB max.
Isolation:	10dB min.
VSWR:	1.8 max.
Amplitude Balance:	±1dB max.
Phase Balance:	±10°
Average Power:	30W
Impedance:	50Ω

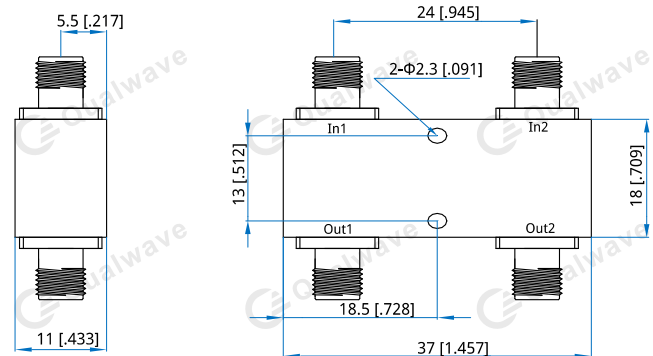
Mechanical

Size ^{*1} :	37*18*11mm 1.457*0.709*0.433in
RF Connectors:	SMA female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHC9-2000-26500-30-S

Customization is available upon request.