

# QHC9-2000-40000-30-K

## 2~40GHz, 30W

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	2~40GHz
Insertion Loss:	2.8dB max.
Isolation:	10dB min.
VSWR:	2 max.
Amplitude Balance:	±1.5dB max.
Phase Balance:	±12°
Average Power:	30W
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	37*18*11mm 1.457*0.709*0.433in
RF Connectors:	2.92mm female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

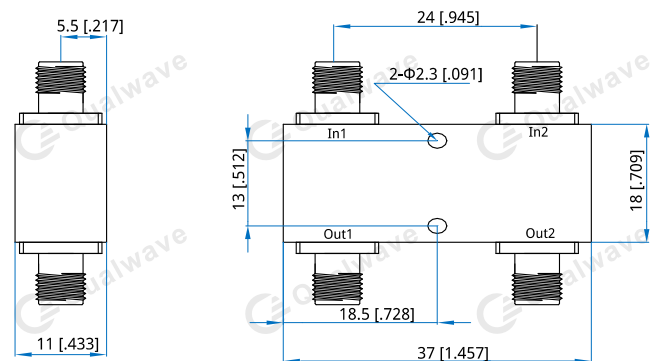

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**QHC9-2000-40000-30-K**

Customization is available upon request.