

QHC9-225-400-K2-N

0.225~0.4GHz, 200W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.225~0.4GHz
Insertion Loss:	0.25dB max.
Input VSWR:	1.25 max.
Oupt VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.6dB max.
Phase Balance:	±2° max.
Impedance:	50Ω
Average Power:	200W
Peak Power:	3000W

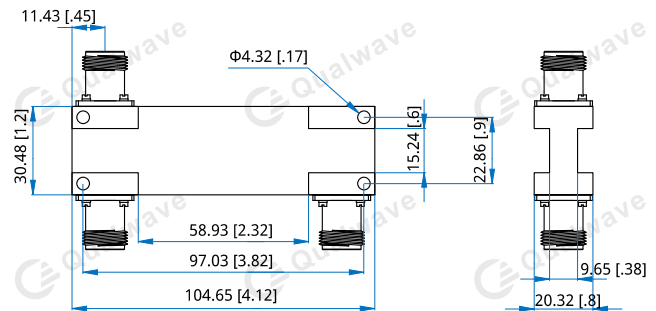
Mechanical

Size*1:	104.65*30.48*20.32mm 4.12*1.2*0.8in
Connectors:	N Female
Mounting:	4-Φ4.32mm through-hole

[1] Exclude connectors.

Enviromental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QHC9-225-400-K2-N

Customization is available upon request.