

QHC9-26000-40000-30-K

26~40GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	26~40GHz
Insertion Loss:	2.2dB max.
VSWR:	1.8 max.
Isolation:	12dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±10°
Average Power:	30W max.
Impedance:	50Ω

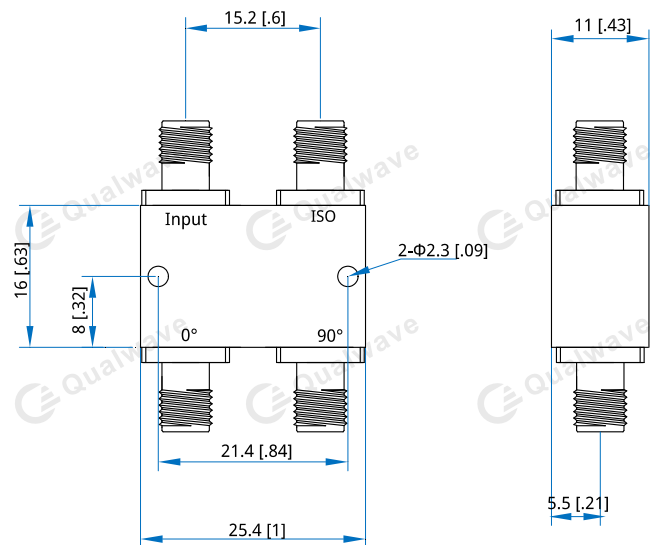
Mechanical

Size ^{*1} :	25.4*16*11mm 1*0.63*0.43in
RF Connectors:	2.92mm Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QHC9-26000-40000-30-K

Customization is available upon request.