

QHC9-3200-4000-30-S

3.2~4GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.2~4GHz
Insertion Loss:	0.5dB max.
Isolation:	20dB min.
VSWR:	1.3 max.
Amplitude Balance:	±0.6dB
Phase Balance:	±2°
Average Power:	30W
Impedance:	50Ω

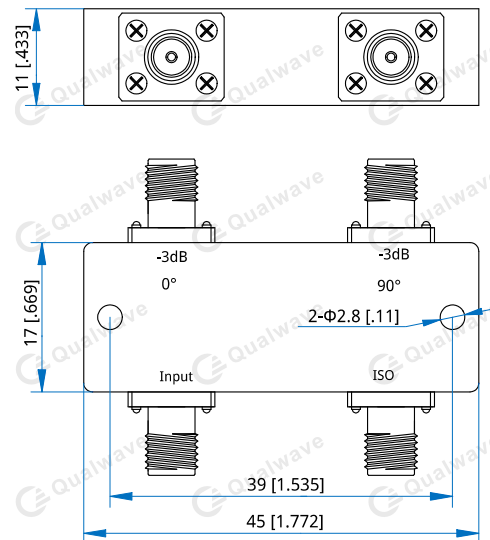
Mechanical

Size*1:	45*17*11mm 1.772*0.669*0.433in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature: -30~+70°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QHC9-3200-4000-30-S

Customization is available upon request.