

# QHC9-400-650-K8-N

400~650MHz, 800W

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

## Electrical


Frequency:	400~650MHz
Insertion Loss:	0.5dB max.
VSWR:	1.35 max.
Isolation:	16dB min.
Phase Balance:	5° max.
Amplitude Balance:	±0.6dB max.
Average Power:	800W max.
Peak Power:	4KW max.

## Mechanical

Size*1:	410*102*36mm 16.142*4.016*1.417in
RF Connectors:	N Female
Mounting:	8-Φ5mm through-hole

[1] Exclude connectors.

## Outline Drawings

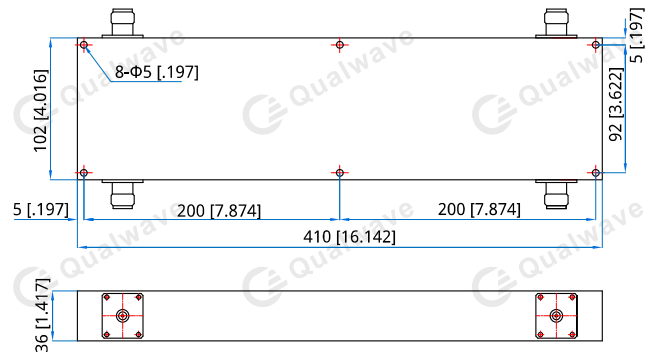

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

## How To Order

**QHC9-400-650-K8-N**

Customization is available upon request.