

# QC2-ML4G-D

## 2.4mm Connector, DC~50GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~50GHz
VSWR:	1.15 max.
Impedance of Dielectric:	3000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	750V DC
Impedance:	50Ω


### Mechanical

RF Connector:	2.4mm Male
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI & PTFE or PEI
Inner Conductor:	Gold Plated Beryllium Copper


### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

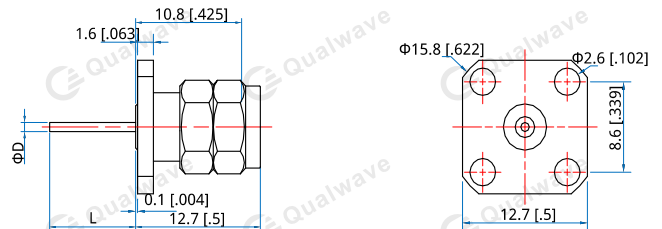

Part Number	ΦD	L
QC2-ML4G-D64-01	0.64 [0.025]	10 [3.94]
QC2-ML4G-D86-02	0.86 [0.034]	8.75 [3.44]

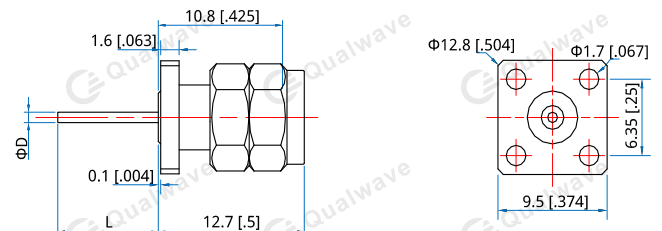

Part Number	ΦD	L
QC2-ML4G-D64-03	0.64 [0.025]	10 [3.94]
QC2-ML4G-D86-04	0.86 [0.034]	8.75 [3.44]

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]