

QBF-1000-1800-30

1~1.8GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1~1.8GHz
Passband Width:	800MHz min.
Insertion Loss:	2dB max.
Stopband Attenuation:	30dB@800MHz min. 30dB@2200MHz min. 60dB@100MHz min. 60dB@3000MHz min.
VSWR:	1.5 max.

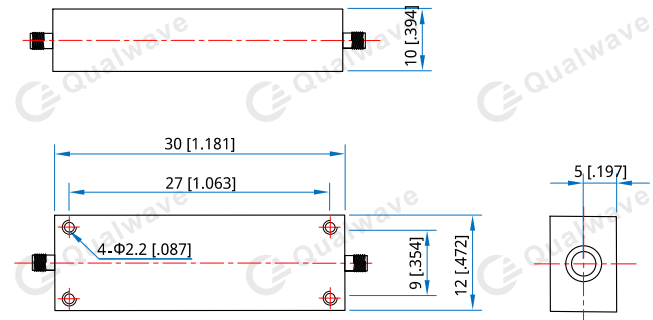
Mechanical

Size ^{*1} :	30*12*10mm 1.181*0.472*0.394in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm Through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-1000-1800-30

Customization is available upon request.