

QBF-10200-10600-30

10.2~10.6GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10.2~10.6GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	30dB@10GHz min. 30dB@10.8GHz min.

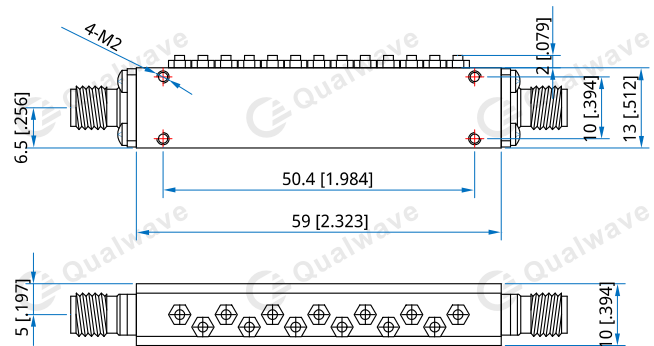
Mechanical

Size ^{*1} :	59*13*10mm 2.323*0.512*0.394in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

QBF-10200-10600-30

Customization is available upon request.