

QBF-1050-2250-30

1.05~2.25GHz, 30dBc

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	1.05~2.25GHz
-2.5dB Passband Width:	1.2GHz min.
Passband Insertion Loss:	5dB max.
Stopband Attenuation:	30dBc@0.3GHz min. 60dBc@3GHz min.
VSWR:	1.5 max.

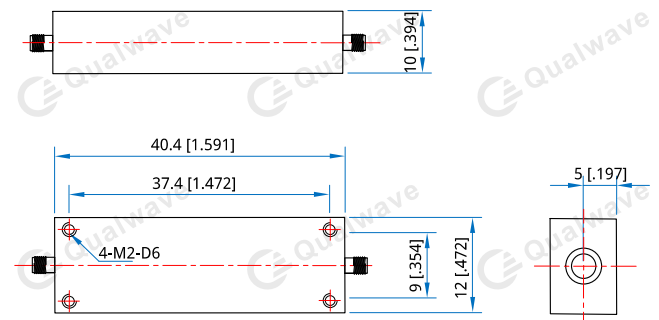
Mechanical

Size ^{*1} :	40.4*12*10mm 1.591*0.472*0.394in
RF Connectors:	SMA female
Mounting:	4-M2 depth 6mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-1050-2250-30

Customization is available upon request.