

# QBF-1100-1600-50

1.1~1.6GHz, 50dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	1.1~1.6GHz
Passband Insertion Loss:	2.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	50dB@0.9GHz min. 50dB@1.8GHz min.
Impedance:	50Ω

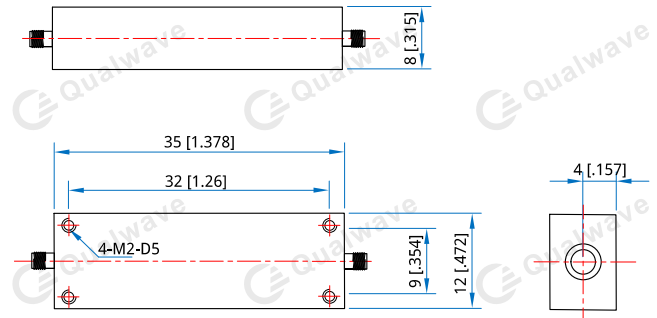
**Mechanical**

Size <sup>*1</sup> :	35*12*8mm 1.378*0.472*0.315in
Connectors:	SMA Female
Mounting:	4-M2 depth 5mm

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-1100-1600-50**

Customization is available upon request.