

# QBF-12800-15800-60

## 12.8~15.8GHz, 60dB

**Features:**

- \* High Stopband Rejection
- \* Small Size

**Applications:**

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

**Electrical**

Passband:	12.8~15.8GHz
Passband Insertion Loss:	1dB max.
Passband Ripple:	0.5dB max.
VSWR:	1.22 max.
Stopband Attenuation:	60dB@DC~9.85GHz min. 60dB@18.96~23GHz min.
Impedance:	50Ω
Average Power:	5W max.

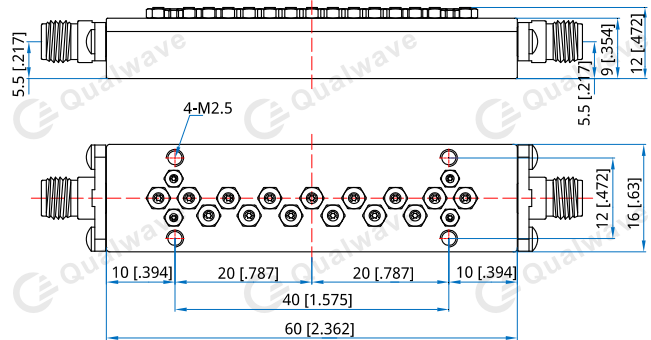
**Mechanical**

Size <sup>*1</sup> :	60*16*12mm 2.362*0.63*0.472in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-30~+70°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**How To Order**

**QBF-12800-15800-60**

Customization is available upon request.