

QBF-1330-1430-45

1.33~1.43GHz

- | | |
|---|--|
| Features:
* High Stopband Rejection
* Small Size | Applications:
* Telecom
* Laboratory Test
* Receivers
* Instrumentation |
|---|--|

Electrical

Frequency:	1.33~1.43GHz
Passband Insertion Loss:	0.5dB max.
Passband Ripple:	0.1dB max.
VSWR:	1.25 max.
Stopband Attenuation:	45dB@DC~1080MHz min. 45dB@1680~4500MHz min.
Impedance:	50Ω
Average Power:	10W max.

Mechanical


Size ^{*1} :	70*26*36mm 2.756*1.024*1.417in
Weight:	0.11Kg
RF Connectors:	SMA Female
Mounting:	4-M2.5 through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

Outline Drawings

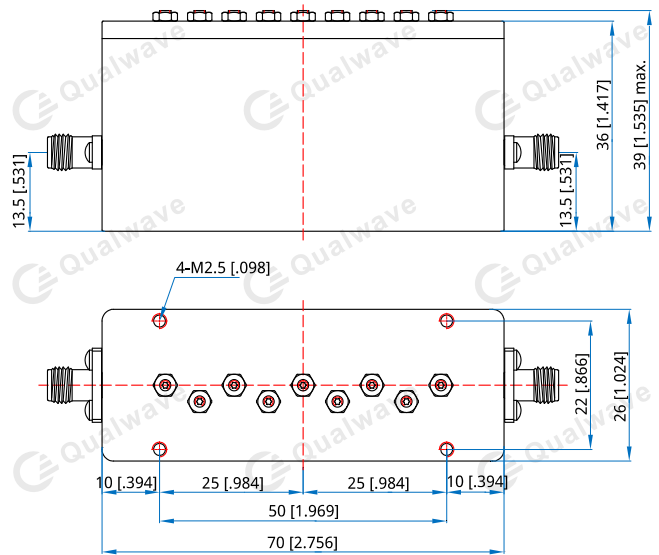

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

QBF-1330-1430-45

Customization is available upon request.