

**Rev 1.1** 



# QBF-136-174-60

0.136~0.174GHz, 60dBc

Features:

\* High Stopband Rejection \* Small Size Applications: \* Telecom

- \* Telecom \* Laboratory Test
- \* Receivers
- \* Instrumentation

#### **Electrical**

Frequency: 0.136~0.174GHz
-1dB Passband Width: 38MHz min.
Insertion Loss: 2dB max.

Stopband Attenuation: 60dBc@350~530MHz min.

VSWR: 1.5 max.

### Mechanical

Size\*1: 30\*12\*10mm

1.181\*0.472\*0.394in

RF Connectors: SMA female


Mounting: 4-Φ2.2mm Through-hole

[1] Exclude connectors.

## **Environmental**

Operating Temperature:  $-40\sim+70^{\circ}$ C Non-operating Temperature:  $-55\sim+85^{\circ}$ C

## **Outline Drawings**

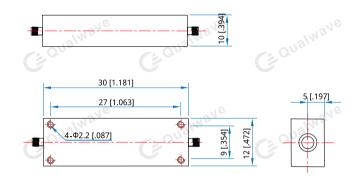

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### **How To Order**

QBF-136-174-60

Customization is available upon request.