

QBF-1650-3150-35

1.65~3.15GHz, 35dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1.65~3.15GHz
Passband Insertion Loss:	0.8dB max. @2400MHz 1.5dB max. @1650~3150MHz
Passband Ripple:	0.8dB max.
VSWR:	1.45 max.
Passband Group Delay:	4.0ns max.
Stopband Attenuation:	35dB@DC~1250MHz min. 35dB@3550~5000MHz min.
Impedance:	50Ω
Average Power:	1W max.

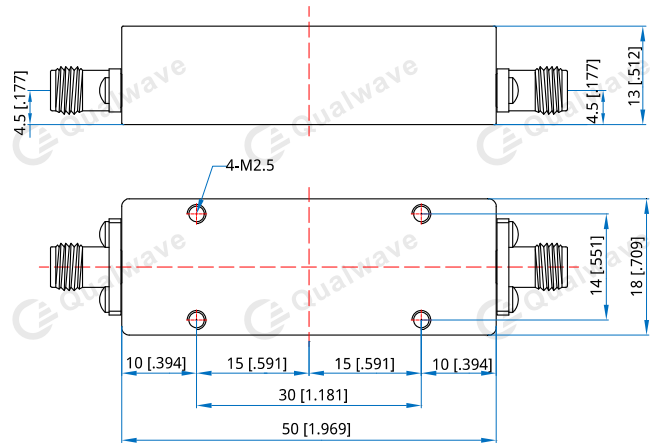
Mechanical

Size ^{*1} :	50*18*13mm 1.969*0.709*0.512in
Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Temperature:	-30~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QBF-1650-3150-35

Customization is available upon request.